





INNOVATIVE PRODUCTS FOR THE LOADING DOCK INDUSTRY


Guide Light™ Configurations

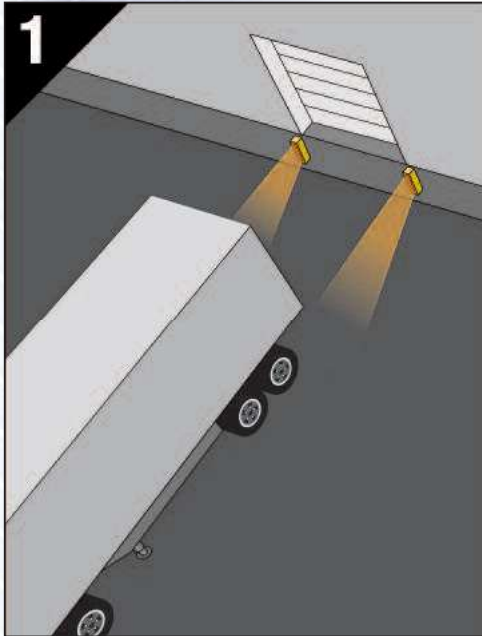

1 Standard Guide Light – Constant yellow on – single inside power source

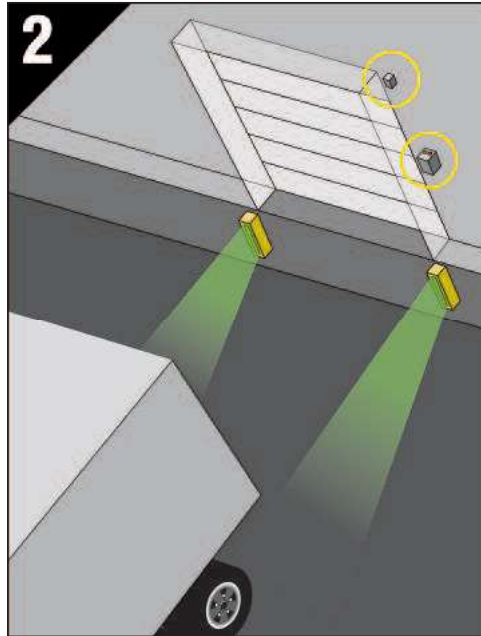


2 Enhanced Safety Guide Light – Inside power supply with indicator lights and door switch (wobble switch or photo-eye) activates red and green Safety Guide Lights

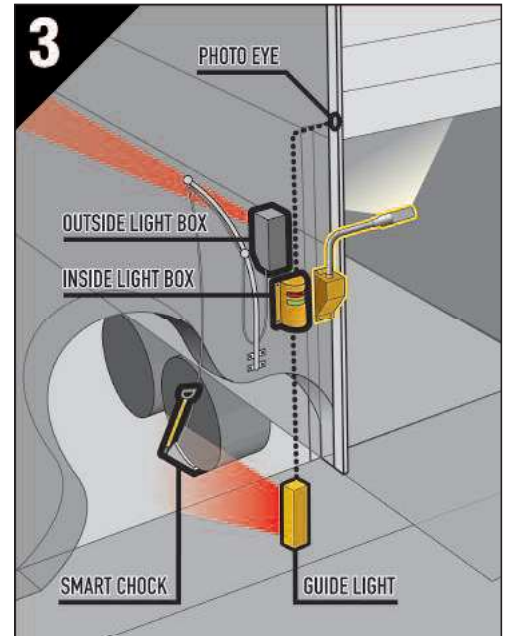

3 Add on with DL Manufacturing Smart Chock™ or Safety Signal™ – Guide Light mirrors red and green signal lights of the outside communication box

SPECIFICATIONS

Outside Light Box	4" x 20", Powder Coated CRS
Inside Power Box	4.5" x 7.5", Powder Coated CRS
Multicolor LED's	Green, Red and Yellow – Pending on Model
Power Requirements	100-277 VAC, 50/60 Hz, 1 ph (low voltage to Outside Light Box)
Power Draw	0.05 A



A Product of



340 Gateway Park Drive
North Syracuse, NY 13212
Phone: 315-463-7348
Fax: 315-463-8559
www.dlmanufacturing.com

TOLL FREE 866-235-7468



**PROUDLY MANUFACTURED
IN THE USA**

092713

Visit www.dlmanufacturing.com to view our complete line of loading dock products.