



INNOVATIVE PRODUCTS FOR THE LOADING DOCK INDUSTRY



# Heat-treated, Extruded Aluminum Wheel Chocks...

handle the job better than rubber wheel chocks.

The chocks dimensions, serrated tire contact and bottom grip surface resists trailer pullout more effectively than rubber wheel chocks. This high strength heat-treated aluminum wheel chock has been tested for optimum design & functionality.

## Base Models


- HC100D (Driver's Side)
- HC100P (Passenger's Side)

## SPECIFICATIONS

- Height 8"
- Width 7.4"
- Length 11.8"
- Weight 7 lbs

## OPTIONS

- 20' coil chain with hanging bracket HC5007
- Safety sign "WHEELS MUST BE CHOCKED" HC4005
- Sawtooth Backer Plate SC5067

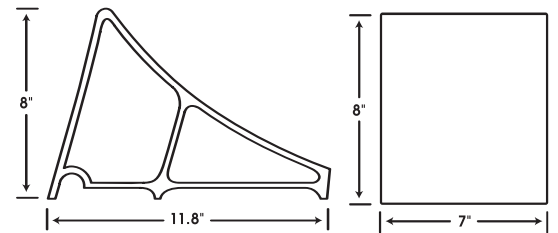

A Product of



340 Gateway Park Drive  
North Syracuse, NY 13212  
Phone: 315-463-7348  
Fax: 315-463-8559  
www.dlmanufacturing.com

**TOLL FREE 866-235-7468**



**PROUDLY MANUFACTURED  
IN THE USA**

031914

Visit [www.dlmanufacturing.com](http://www.dlmanufacturing.com) to view our complete line of loading dock products.