



INNOVATIVE PRODUCTS FOR THE LOADING DOCK INDUSTRY

Incorporate **Strap Barrier** with Smart Chock or Safety Signal to help reduce the potential for dock accidents and improve production

Strap Barrier and Safety Signal communication system setup

The Strap Barrier with optional proximity sensor can be used with Safety Signal at facilities that typically keep their doors open.

Strap Engaged:

Inside Box Red

Outside Box Green

Versa Light* OFF

Auxiliary Output OFF

Strap Disengaged:


Inside Box Green

Outside box Red

Versa Light* ON

Auxiliary Output ON

*Versa Light optional

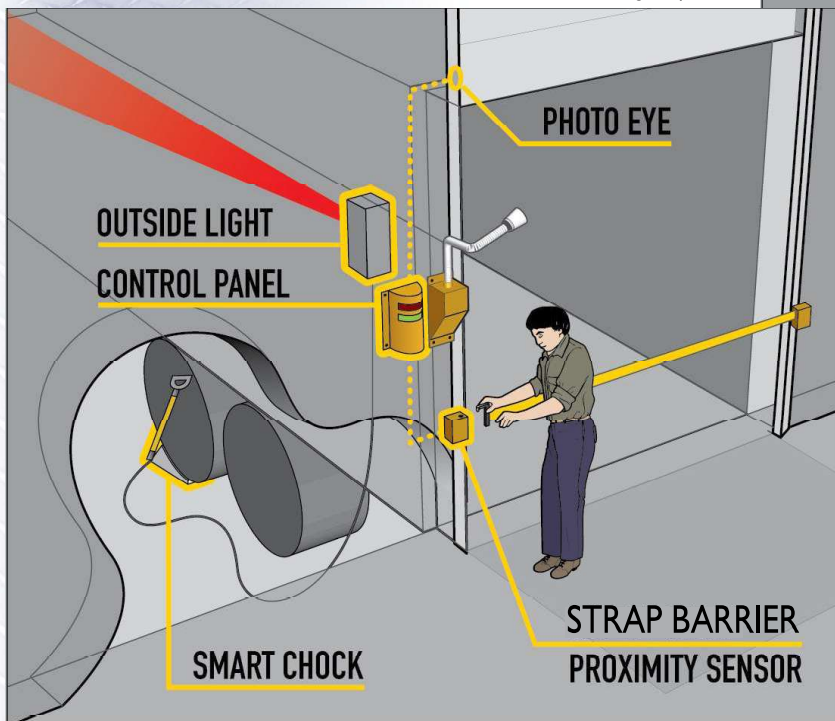


Model 204 Specifications:

- Includes proximity sensor to incorporate with Safety Signal or Smart Chock
- Powder coated steel housing
- High strength durable nylon strap
- Spring loaded retractable with soft recoil
- Fits up to 14' doors

Model 203 Specifications:

- Powder coated steel housing
- High strength durable nylon strap
- Spring loaded retractable with soft recoil
- Fits up to 14' doors

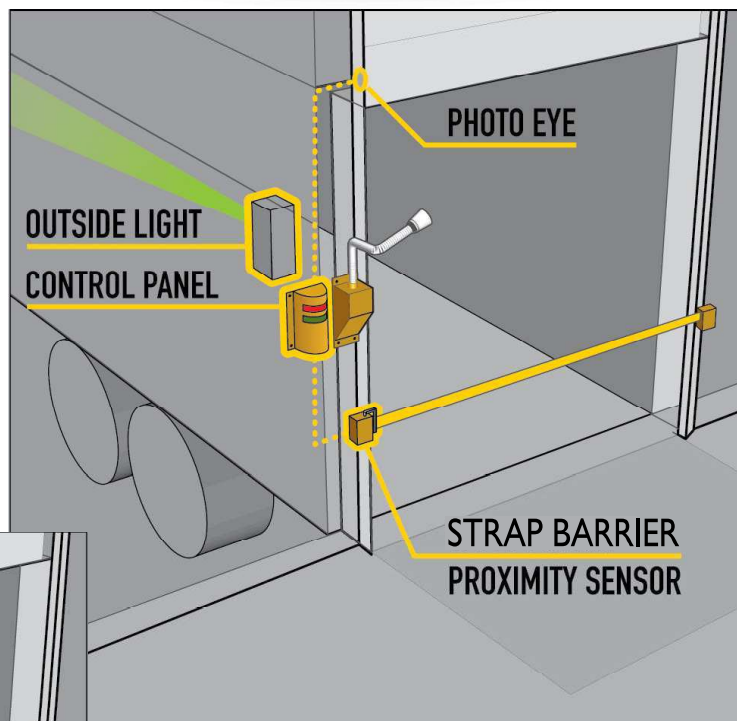

Strap Barrier and Smart Chock communication system setup

When supplied with optional proximity sensor, Strap Barrier can be integrated with Smart Chock. The Strap Barrier replaces the function of the dock door opening and closing when the facility operates with the loading dock doors open.

STRAP BARRIER™

A Product of



340 Gateway Park Drive
North Syracuse, NY 13212
Phone: 315-463-7348
Fax: 315-463-8559
www.dlmanufacturing.com

TOLL FREE 866-235-7468



PROUDLY MANUFACTURED
IN THE USA 110724

Visit www.dlmanufacturing.com to view our complete line of loading dock products.